



COILS 30 mm x Ø 13 mm with cable

BSA08223DS

÷

BVA08223DS



COIL **BSA** with cm 100 cable
BVA with cm 50 cable

Coil housing material: PA - Black Polyamide - class F (155°C)

Winding: In class H

Electrical connections: Cables

COIL HOUSING AND COIL FORMER MATERIAL ARE MADE BY 100% VIRGIN MATERIAL.

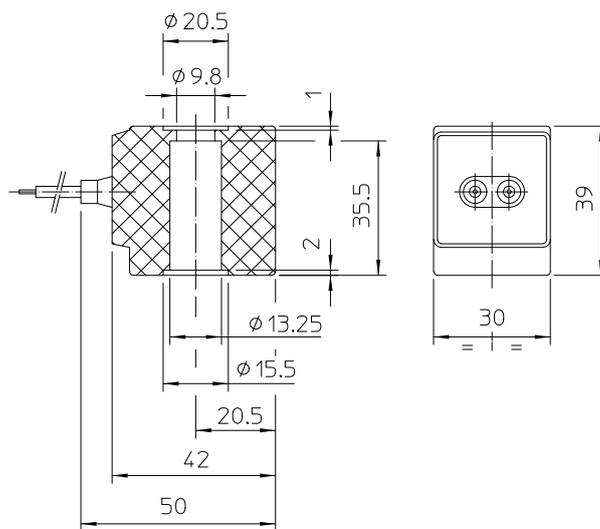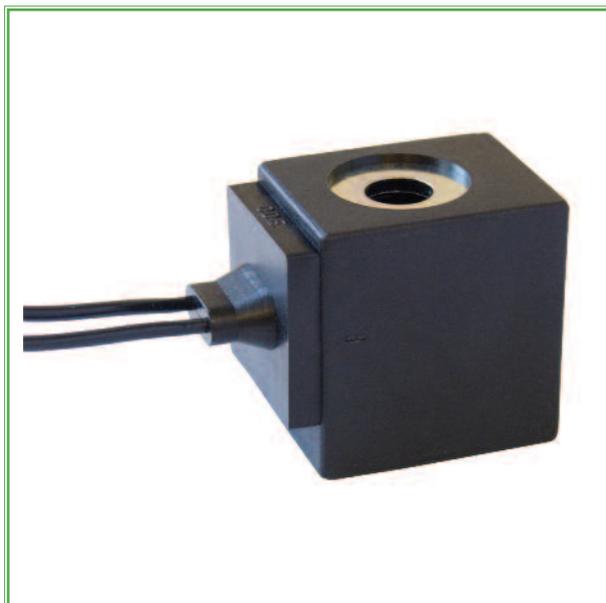

MATERIAL ON STOCK:

Code	Power	Voltages Frequency	ED	Ambient temperature	Approvals
BSA08223DS	14,5 VA	220/230 ~ 50/60	100%	- 10°C + 40°C	CE
BVA08223DS	14,5 VA	220/230 ~ 50/60	100%	- 10°C + 40°C	CE

NOMINAL VOLTAGE DC + 10% - 5%
TOLERANCES: AC +10% - 15%

ATTENTION: Coil without cable protection, connect the S.V. to a suitable earthing system
 Other voltages and power absorptions available on demand and for quantities.

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notification.